


# Digital transmitter with digital adjustment

## RU 22

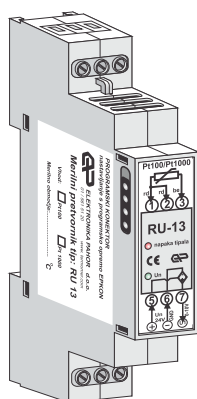


Dual measuring transmitter type RU-22 is used for converting resistance of two Pt1000 temperature sensors in two 0 - 10V voltage output signals. Housing of transmitter is made for mounting on DIN rail inside of control cabinets. The EPKON software application allows user to set the measuring range of transmitter, type of temperature sensor, offset and filter.

### TECHNICAL DATA

Measuring input:	2x sensor Pt1000	2 wire connection
Sensor current:	250µA	
Range limits:	Pt100 -200°C .. 600°C	programmable
	Pt1000 -100°C .. 300°C	programmable
Filter:	none , 1, 2, 5, 10, 30 sek	programmable
Linearization:	>0,1%FS	
Measurement accuracy:	>0,2%FS	
Sampling rate:	6/s	
Temperature change settling time:	< 0,2s	
Supply voltage :	12 .. 36 Vdc	
Consumption:	<1VA	
Output signal:	0 ... 10V	R>5kΩ
Resolution:	13 bit	
Probe break:	rising to > 10V	
Status signaling:	transmitter supply, probe break	LED
Operating temperature:	- 40 .. +80°C	
Temperature coefecient	0,015K/°C	
Mounting:	DIN rail	
Housing:	ABS plastika	
Dimensions:	90x60x17,5 mm	
Protection grade:	IP 20	

### CONNECTION DIAGRAM

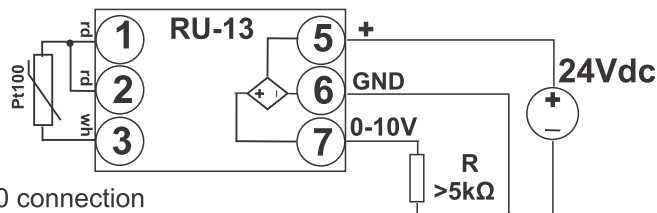

With two-wire Pt100 connection are clamps 1 and 2 short-circuited.

### LIST OF DOCUMENTATION

- Instructions for mounting and usage of transmitter RU-13
- Programming
- Datasheet
- Declaration of conformity

inst-RU13/1  
inst-EPKON  
DATASHEET-RU13  
izCE-RU10/1



www.termomer.com

ELEKTRONIKA PAHOR d.o.o.

Brnciceva 9a  
1231 Ljubljana-Crnuce  
SI-Slovenia, Europe

tel: +386 (0)1 561 51 20  
fax: +386 (0)1 561 13 308  
info@termomer.com