



ORDERING
TABLE:

Probe type CK

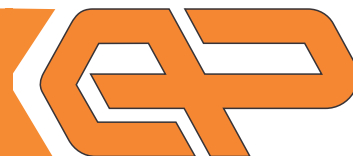

CK	X	X	XX	X	X
Inserted sensor:					
Pt100 B	1				
Pt100 A	3				
Pt1000 B	10				
NTC 10K	T10				
KTY81	81				
Ni1000, 5000 ppm/K	15				
Ni1000, 6178 ppm/K	16				
Probe diameter Φ_p:					
6 mm		6			
Custom		X			
Probe length L_v:					
30 mm			30		
40 mm			40		
50 mm			50		
80 mm			80		
100 mm			100		
150 mm			150		
XXX mm			XX		
Connection cable insulation:		Connection cable length L_k:			
PVC	2 m			PVC 02	
	> 2 m			PVC XX	
Silicone	2 m			Si 02	
	> 2 m			Si XX	
Teflon	2 m			T 02	
	> 2 m			T XX	
Fiberglass with steel overbraids	2 m			SVO 02	
	> 2 m			SVO XX	

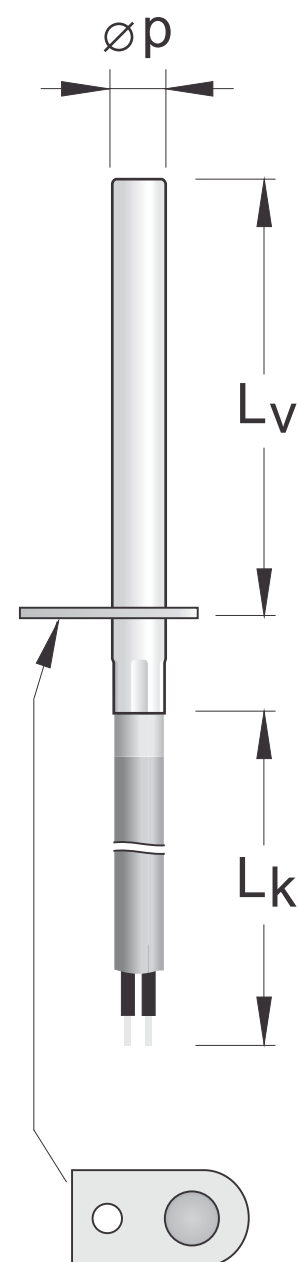

Example of ordering:

Code: **CK 3 - 6 - 50 - T 02** means:

- CK** - cable temperature probe type CK
- 3** - inserted sensor Pt100, tolerance class A
- 6** - probe diameter $\Phi_p = 6$ mm,
- 50** - probe length $L_v = 50$ mm,
- T** - connection cable insulation: teflon,
- 02** - connection cable length: 2m.



www.termomer.com

ELEKTRONIKA PAHOR d.o.o.

Brnciceva 9a
1231 Ljubljana-Crnuce
SI-Slovenia, Europe

tel: +386 (0)1 561 51 20

fax: +386 (0)1 561 13 308

info@termomer.com